
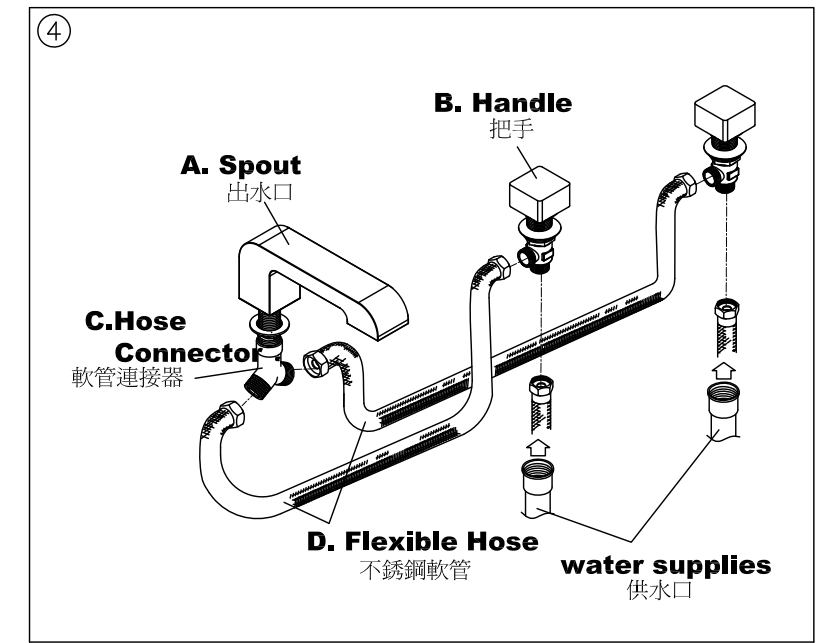
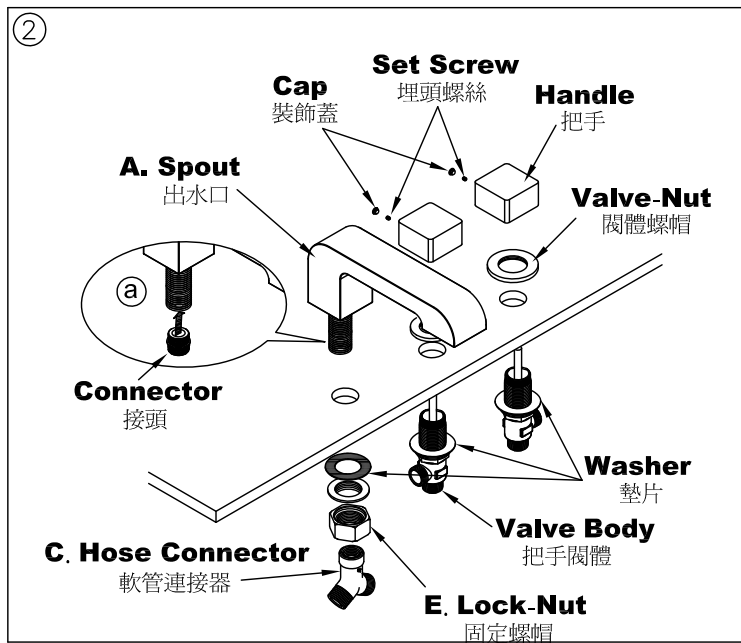


INSTALLATION INSTRUCTION for Two-Handles Bathtub Faucet

浴缸龍頭組安裝說明

1. Drill 3 holes on appropriate position as shown in figure 1 .
如Fig. 1 所示在適當的位置鑽3個孔.
2. Disassemble **Handles** and **Valve-Nuts** from **Valves** before installing as shown in figure 2 .
如Fig. 2 所示安裝前將把手與閥體螺帽從把手閥體拆下.
3. a. Insert the **Spout** through the $\phi 35\text{mm}(1.38\text{'})$ hole , then secure **Spout** by tightening **Connector** and **Lock-Nut** with **Washer**, then fasten **Hose Connector** (make sure O-ring seals have to be installed into grooves before join together with **Hose Connector**) as shown in figure 3 .
如 Fig. a 所示先將接頭塞入出水口底部的連接管,如 Fig. 3 所示將出水口穿過 $\phi 35\text{mm}(1.38\text{'})$ 的孔,然後鎖緊固定螺帽和墊片來固定出水口. 再接上軟管連接器.(裝上軟管連接器之前,請先確認O型橡皮環已裝在溝槽內)
- b. Insert the **Valve Bodys** from below through the $\phi 35\text{mm}(1.38\text{'})$ holes and fasten the **Valve-Nuts**, then secure the **Valve Bodys** by tightening the **Lock-Nuts** with **Washer** . Before fasten **Handles**, ensure that handle's are properly aligned when **Valves** are in closed position. Then, tighten **Handles** and insert the **Caps**.
如Fig. 3 所示將把手閥體從下方穿過 $\phi 35\text{mm}(1.38\text{'})$ 的孔並且鎖入閥體螺帽,然後鎖緊固定螺帽和墊片來固定把手閥體. 完全固定前,當閥體關閉時,請先確認各把手朝向同一方向. 固定把手後,再蓋上裝飾蓋.
4. a. Connect **Valve Bodys** to **Spout Connector** and **water supplies** with **Flexible Hoses** as shown in figure 4 .
如Fig. 4 所示用不銹鋼軟管連接把手閥體到軟管連接器以及供水口.

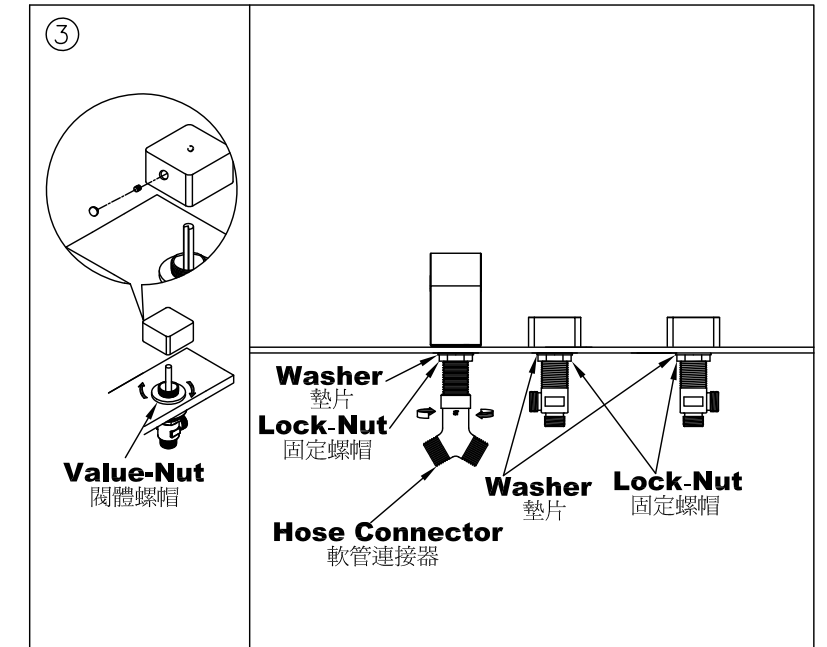

FIXING CONTENTS

組配件內容

