


INSTALLATION INSTRUCTIONS

SINGLE-HANDLE LAVATORY FAUCET

檯面龍頭安裝說明

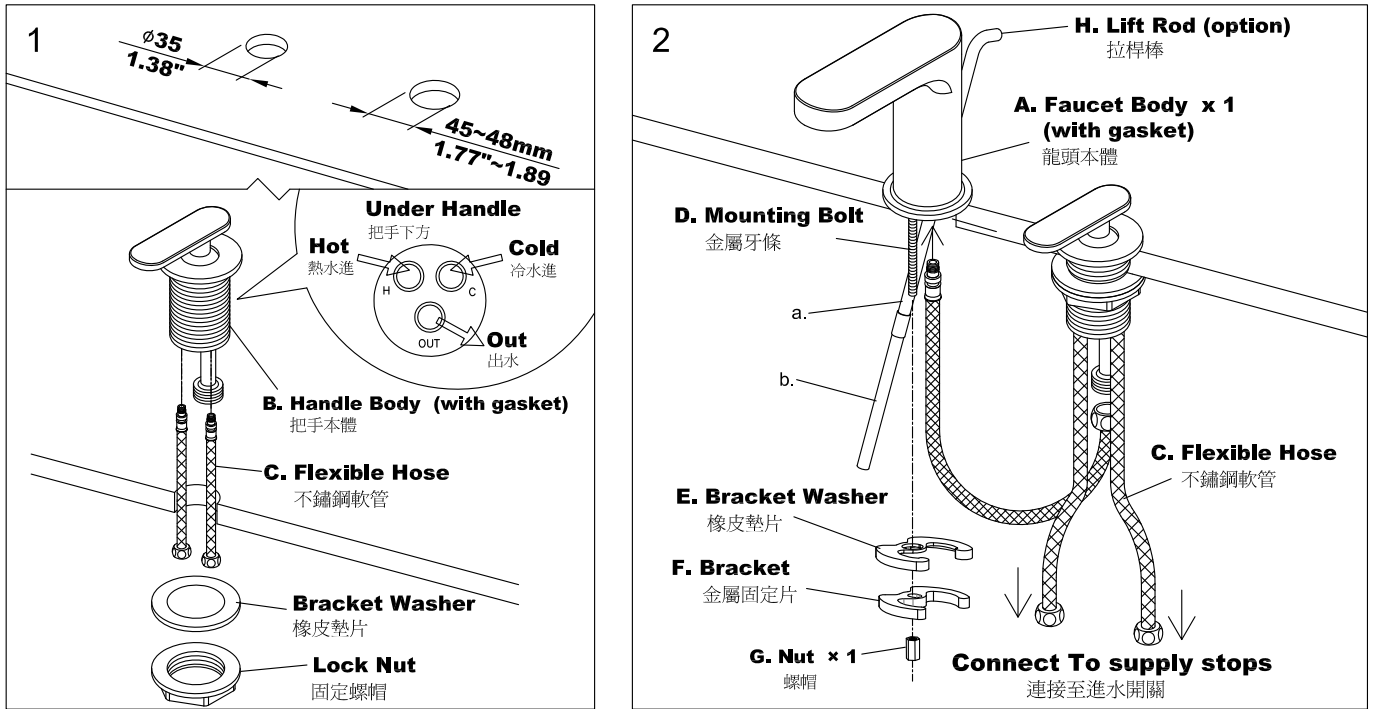

CAUTION : Risk Of Product Damage.

注意：為增加產品使用壽命，請依說明清潔供水管路。

a./ Turn the angle stops (water suppliers) on and run for 1 minute before connect supply hose (flexible hose) to faucet body. or b./

安裝編織管之前，先把供水開關全開排水一分鐘。或 b./

b./ Connect and tighten the faucet and angle stops with supply hose (flexible hose) to finish installation, then remove the aerator, fully turn on the hot and cold water valves on faucet and run for 1 minute, then turn off the water and reinstall the aerator.

把龍頭、供水開關及編織管接好並鎖緊之後，把起泡器移開，把熱水及冷水全部轉開一分鐘，然後把水關掉再把起泡器裝回去。

1. Drill 2 holes on appropriate position as Fig.1 shown.

在適當的位置鑽2個孔，如圖1所示。

2. Insert **Flexible Hoses (X 2)** through deck hole and screw into the **Hot & Cold inlet of Handle Body**, position **Handle Body** on fixture and place **Lock Nut** with **Bracket Washer** onto **Handle Body**, then tighten **Lock Nut** securely. (Fig.1)

將不鏽鋼軟管(X2)穿過洗臉盆(檯)洞口並且鎖入把手本體，從把手本體下方依序套入橡皮墊片和固定螺帽，確認把手方向位置後，鎖緊螺帽固定把手即可。(圖.1)

3. Screw **Mounting Bolt** and **flexible Hose** into bottom of **Faucet Body**, and position **Faucet Body** on the deck for fixture, then place **Bracket** with **Bracket Washer** onto **Mounting Bolt**, tighten **Nut** securely, meanwhile, assemble **Lift Rod** (option) with **Faucet Body**. (Fig.2)

將金屬牙條與不鏽鋼軟管鎖緊固定於龍頭本體。從金屬牙條下方依序套入橡皮墊片、金屬固定片和螺帽，確認龍頭方向位置後，鎖緊螺帽固定龍頭即可，準備安裝，同時，把拉桿棒組(選擇性零件)裝在龍頭本體上。(圖.2)

4. Connect **Faucet Body's Flexible Hose** to the outlet of **handle body**, and connect Hot & Cold **Flexible Hoses** to supply stops. (Fig.2)

將龍頭本體的不鏽鋼軟管的連接於於把手本體下方(OUT)。連接冷熱進水不鏽鋼軟管到供水開關，確認完成安裝程序。(圖.2)

FIXING CONTENTS

組配件內容

